

BD V2 Device Setup

Customer Registration

- Enter Serial #
- Enter MAC Address
- Enter Email and Select arrow

NOTE: If error pops up, the serial # or MAC address was entered wrong. Or the device is already registered.

If email already exists, the device will be added to customer

3:30

Device Setup

Please provide the device serial number and mac address.
You'll find these printed on your device.

10025

Aa:bb:cc:dd:

customer@basement.com

Use the same email to link the device to an existing account

< BACK | NEXT >

Customer Registration

- Enter First Name and Last Name
- Select Next button in bottom right

1:06

Device Setup

Please provide the device serial number and mac address.
You'll find these printed on your device.

10025

C4:dd:57:7e:4b:14

customer@basement.com ✓

Setting up a new account:


Jason

Bart

< BACK NEXT >


Customer Registration

- Customer Registration is complete
- If 2.0 unit is auto-connected to BD WiFi Router, select Yellow Finish button
- If you need to manually connect 2.0 unit to Homeowner's WiFi then select Next in bottom right

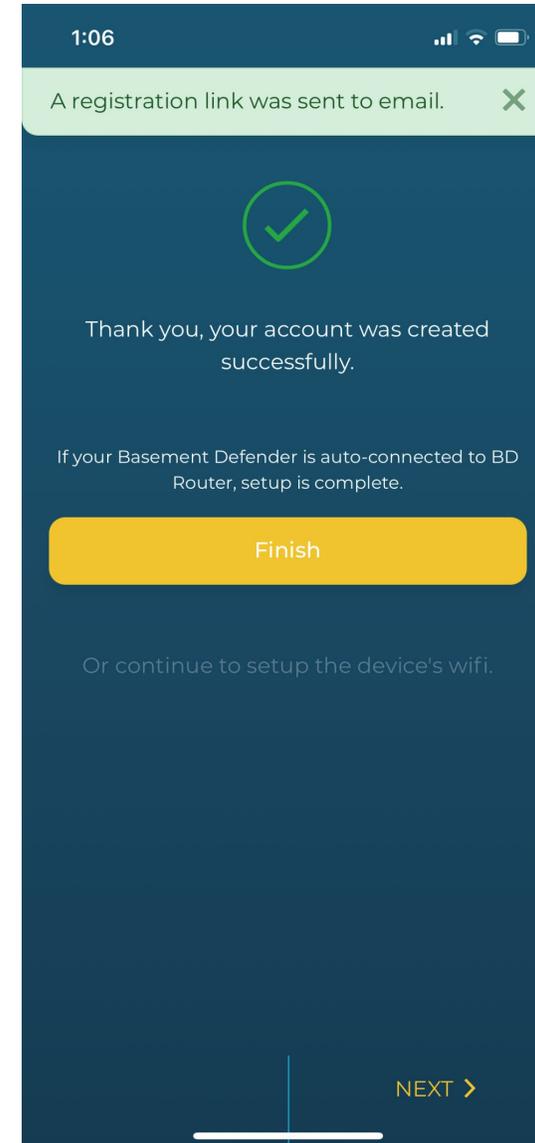

Manual WiFi Setup – Step 1

- Put 2.0 unit into pairing mode by pressing and hold pair button for 3 seconds
- Confirm light ring is flashing blue
- Select Next in the bottom right corner

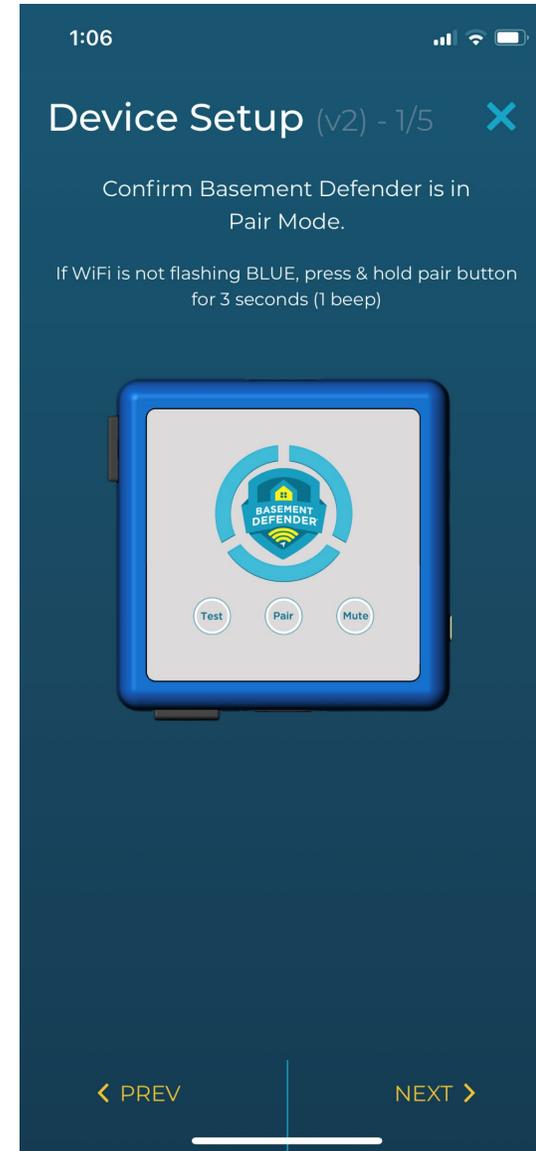


Manual WiFi Setup – Step 2

- Phone will auto pair with 2.0 unit
- Confirm the light ring is solid blue


NOTE: If not pairing, make sure Bluetooth is turned on your phone

If pop up message ask for Bluetooth permissions, select Ok or Allow

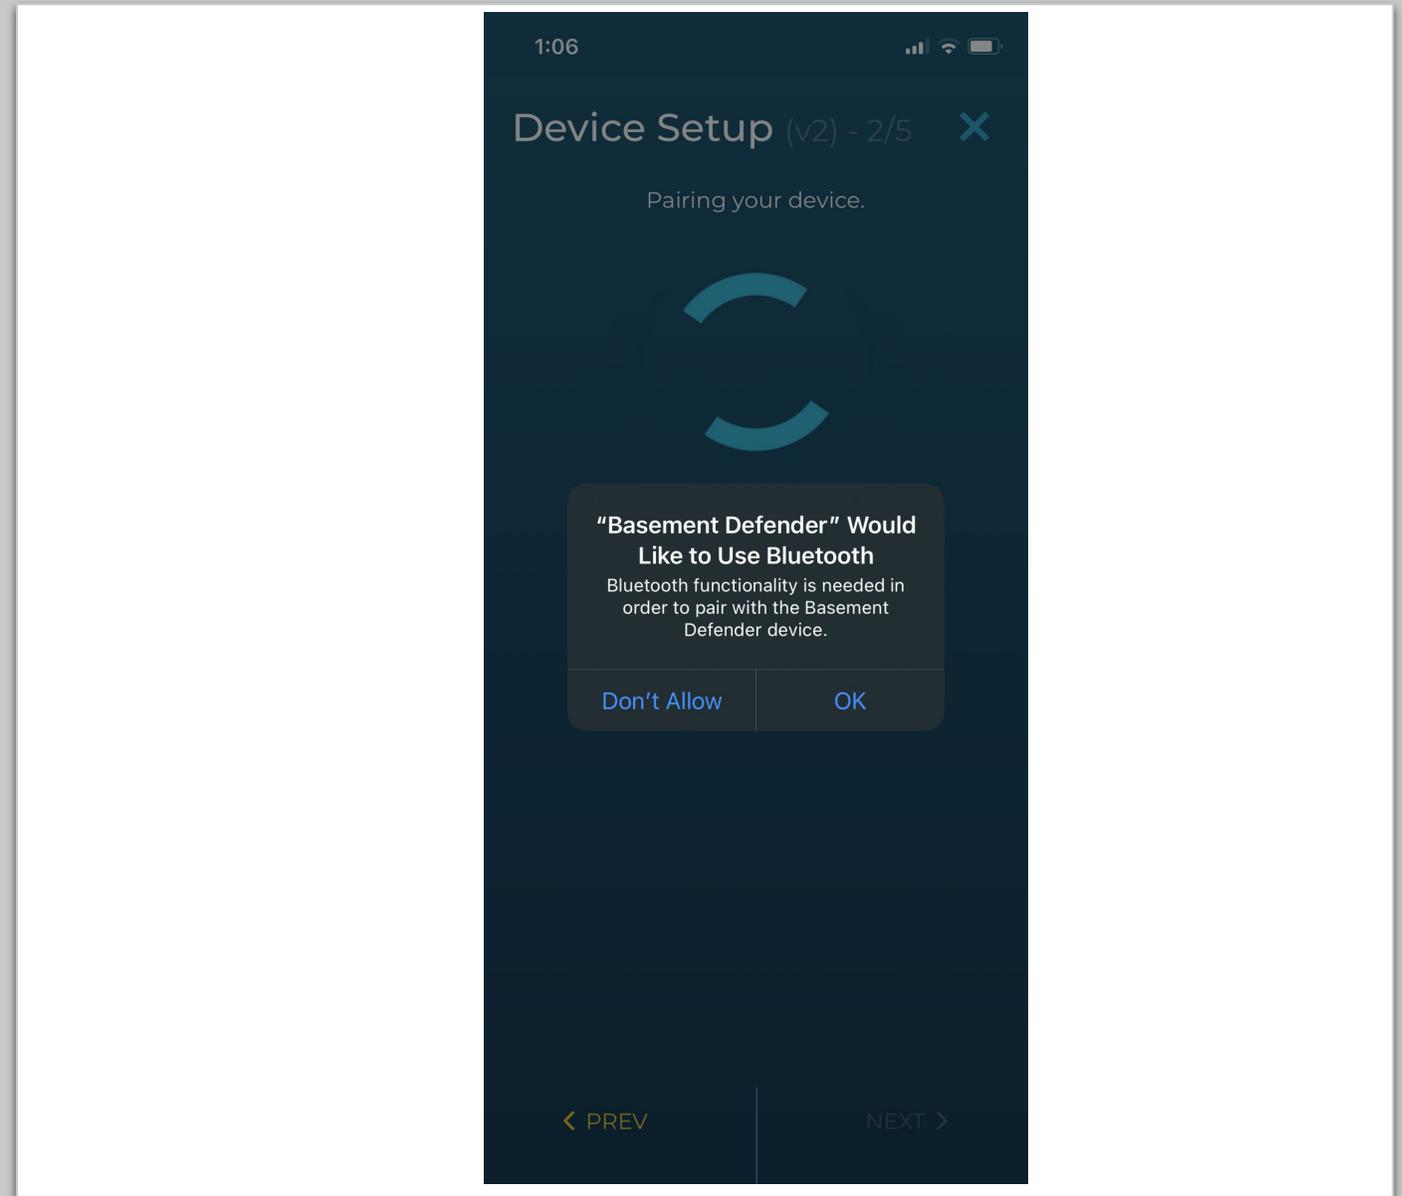


Manual WiFi Setup – Step 3

- Select drop down arrow and select homeowner WiFi network
- Enter Password. You can select the eye button to view the password you are typing
- Select Next button bottom right

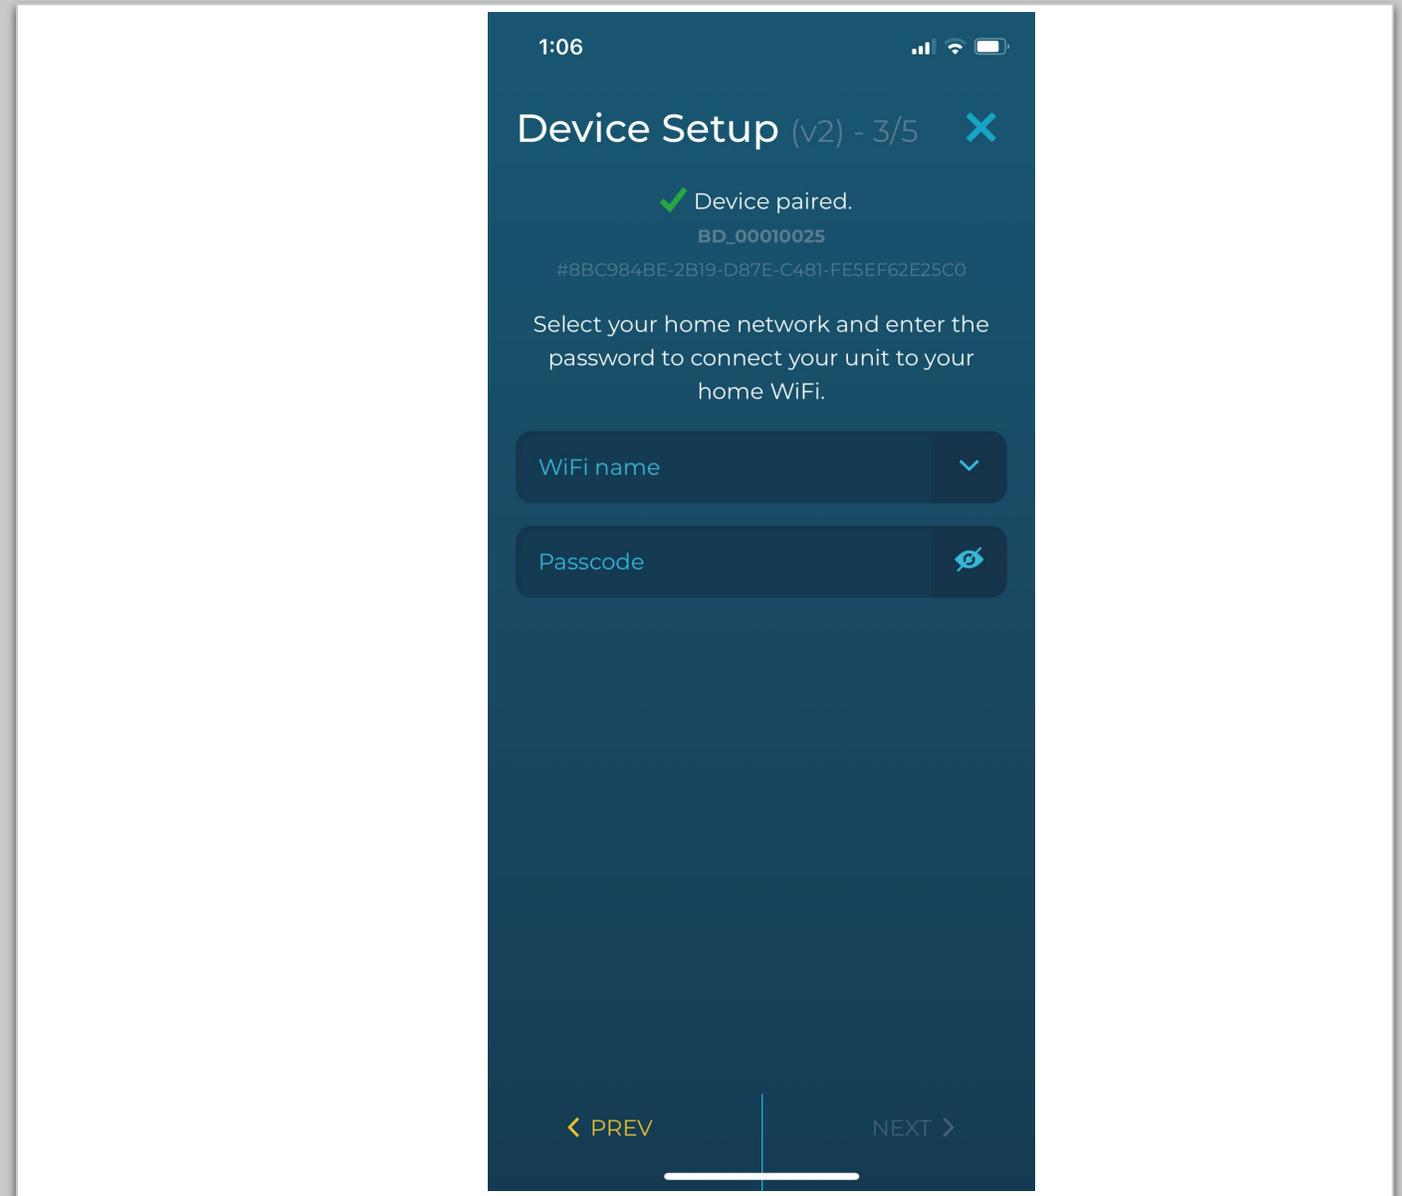


Manual WiFi Setup – Step 4

- Wait while phone confirms 2.0 unit is connected to WiFi
- If success, select next in the bottom right
- If failure, select previous in bottom left

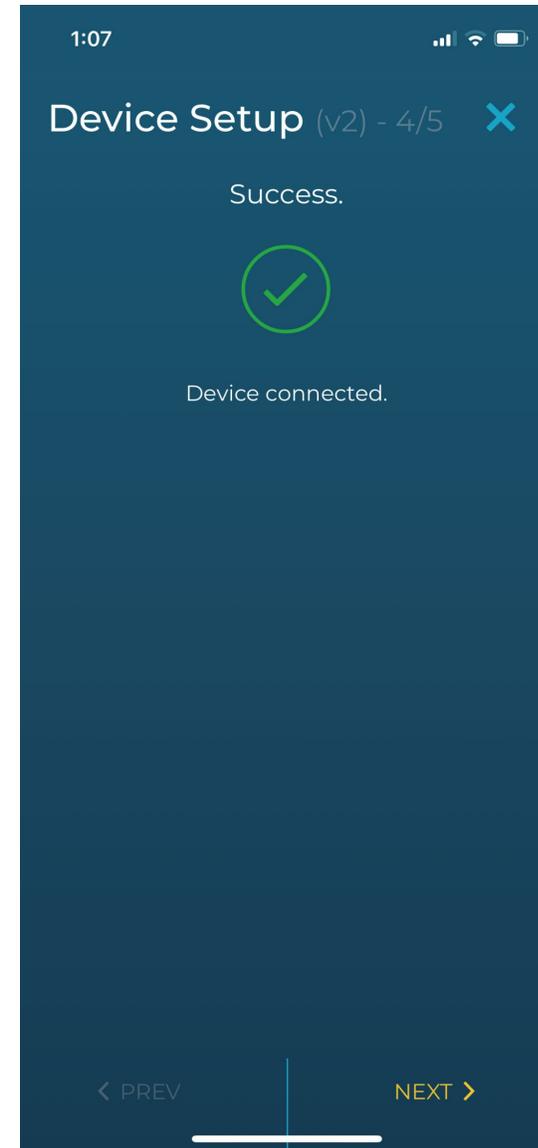

Manual WiFi Setup – Step 5


- Wait while phone confirms 2.0 unit is connected to Portal
- Select Finish button in bottom right

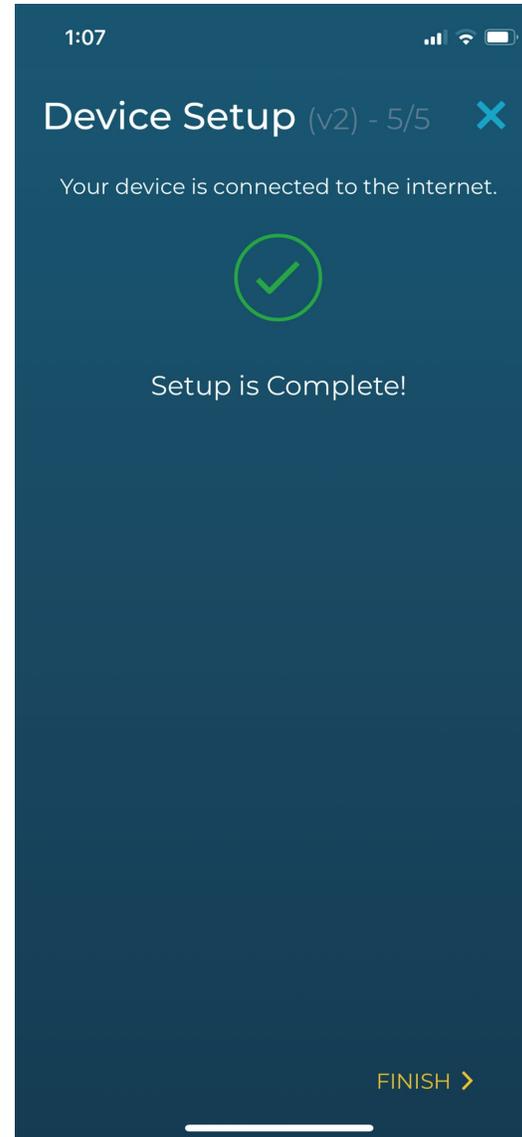

BD V1.5 Device Setup

Manual WiFi Setup – Step 1

- Put BD unit in pairing mode, press & hold pair button for 10 seconds
- Select next button

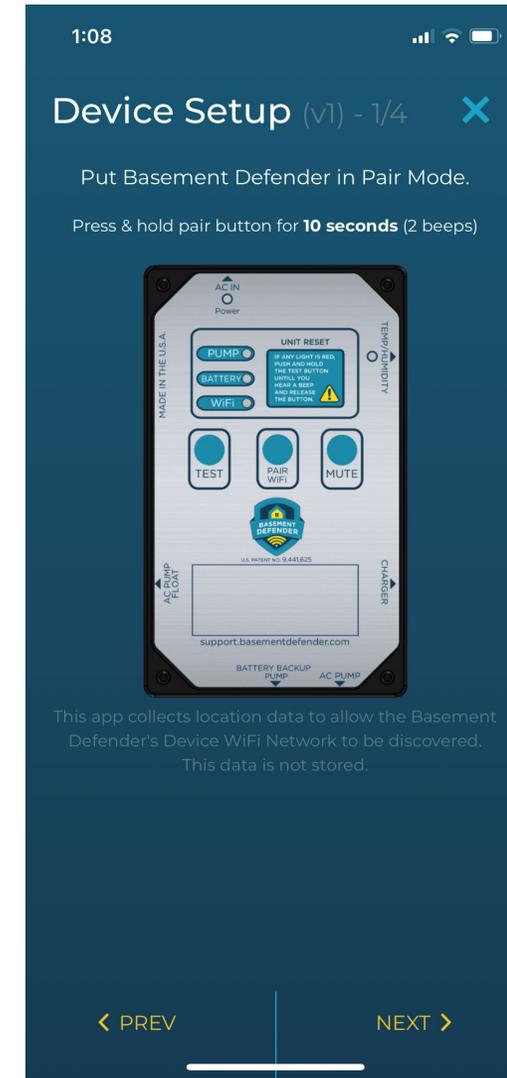


Manual WiFi Setup – Step 2

- Leave BD app, go to WiFi settings on phone
- Select the BD network and enter password to connect
- Return back to BD app, select next button


Note: The BD network and password are listed on the screen if you forget.

If you cannot click the next button, confirm you are connected to BD network first

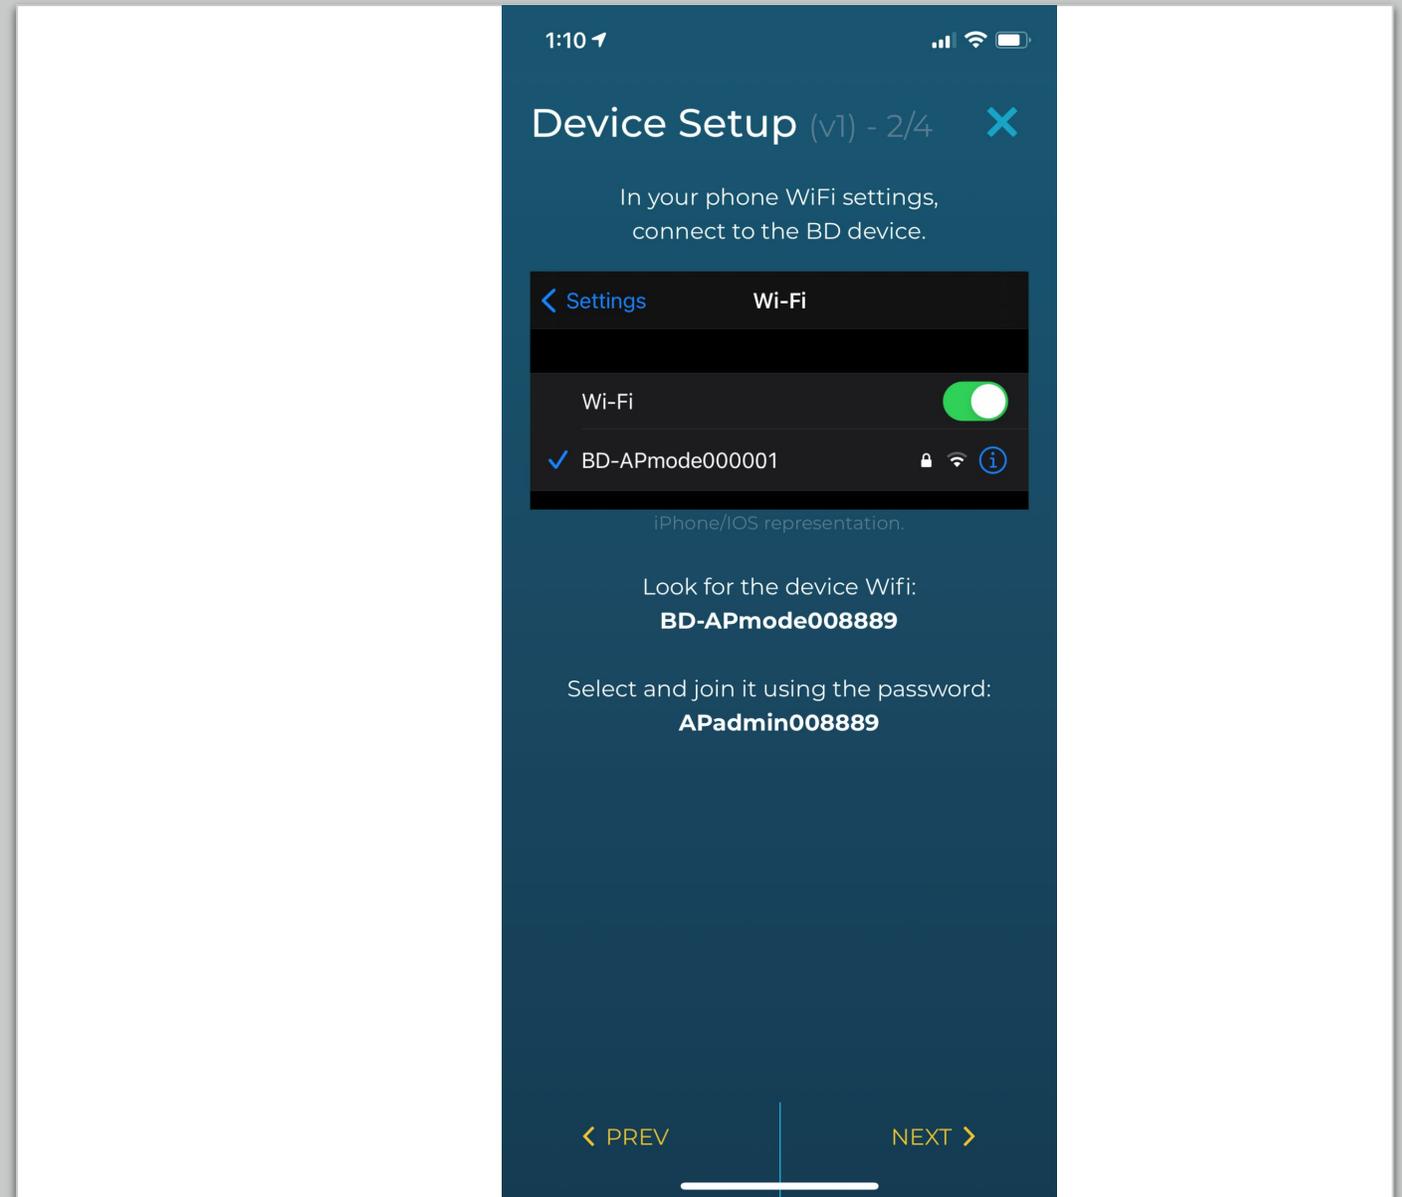

Manual WiFi Setup – Step 3

- Select drop down arrow and select homeowner WiFi network
- Enter Password. You can select the eye button to view the password you are typing
- Select Next button bottom right

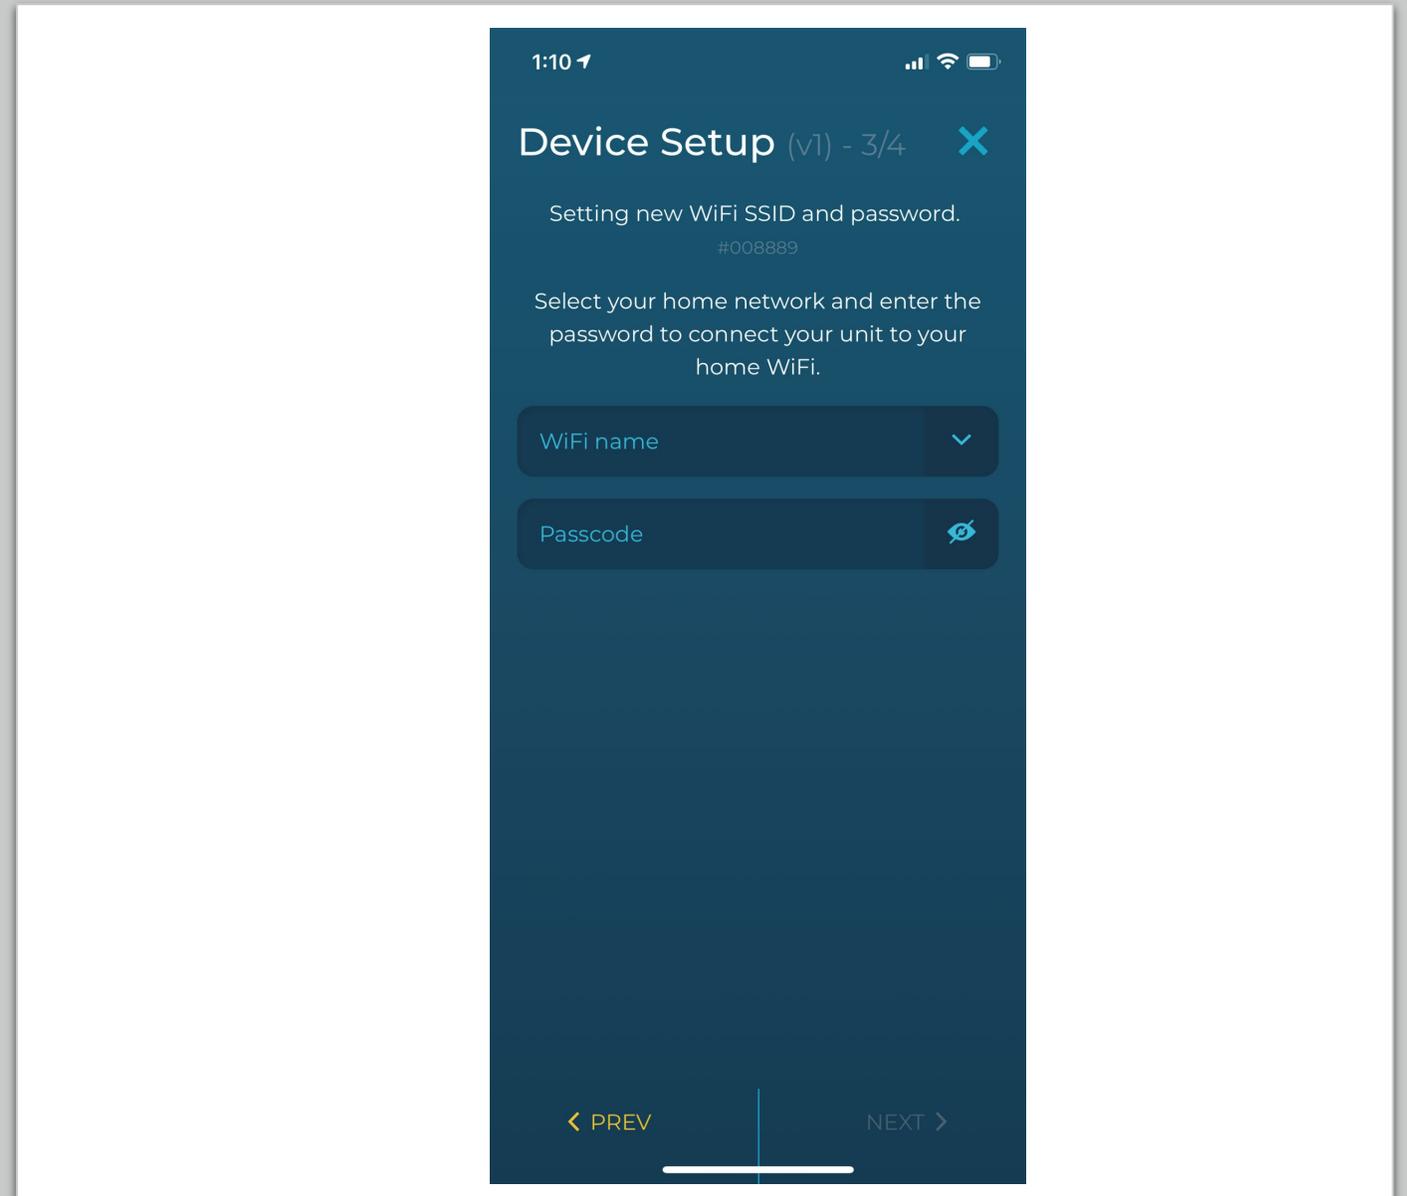

Manual WiFi Setup – Step 4

- Wait while the app confirms your 1.5 unit is connected to WiFi
- If success, select finish button in bottom right
- If failure, restart Step 1

